

An innovative solution

- A compact design, it integrates a larger number of sockets adapted to IT environments, facilitating connection.
- A modern design that can be installed on the floor or on a desk, or also be mounted to the wall.

Protection adapted to meet all your needs

- 5 or 6 output sockets (5 british standard, 6 italian/schuko or french standard) for easy distribution directly to your applications:
 - 4 sockets protected against power cuts and over voltages, aimed at your most sensitive applications (central systems, monitors). The back-up time, able to last up to 30 minutes, enables a standard PC configuration to be saved.
 - 2 sockets (1 for BS) protected against over voltages alone for use with less critical applications (1200 VA) and high absorption consumers (laser printers).

Protection for your phone line

- Protection for the telephone/modem/ADSL line (RJ11 connector) against the risk of on-line overvoltage.

Easy to use

- Operating mode indicated by means of the mimic panel connected to the status indicator lights and the **UNI VISION** communication software.
- Easy battery maintenance (user replaceable).

HIGH
FREQUENCY UPS

2 YEAR GUARANTEE



NETYS 008 B 1 CAT

Your protection for

- > PC: LCD or CRT monitors, scanners, printers, etc.
- > Cash registers
- > Interactive terminals




Connections



1. Filtered output sockets
2. Inverter output sockets
3. Input socket and fuse
4. Telephone/modem line protections

5. RS232/USB serial port
6. Battery replacement flap
7. Bracket for wall mounting

Control panel

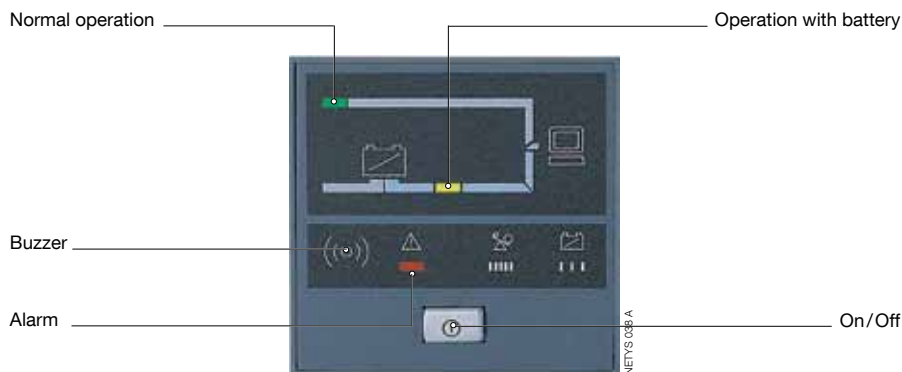

Communication option

- **UNI VISION software** for the control and automatic shutdown of applications connected to Windows™ and Linux. Free to download from our website: www.socomec.com.

Technical data

MODELS	NETYS PL 550	NETYS PL 750
ITEM CODE	NET550F-PL	NET750F-PL
UPS power	550 VA (330 W)	750 VA (450 W)
Power (surge)	1200 VA	1200 VA
Input	230 V (170 ÷ 260 V) ; 50 / 60 Hz with automatic selection	
Output	230 V nominal ; 50/60 Hz	
Output socket	6 sockets: n° 4 UPS and n° 2 surge (over voltage)	
Telephone protection	telephone line/modem/ADSL input/output: RJ11	
BATTERIES		
Type	sealed lead-acid maintenance free - expected life 3/5 years	
Back-up time ⁽¹⁾	20 min.	30 min.
COMMUNICATION		
Interface	RS232 and USB serial port (free software via Internet)	
ENVIRONMENT		
Dimensions W x D x H (mm)	160 x 210 x 125	
Weight (kg)	5.3	5.5
Reference standards	(EN) IEC 62040-1-1 (safety), EN 50091-2/IEC 62040-2 (EMC), EN 61000-4-5/C62.41: 1991 (over voltages)	

(1) PC + 15" LCD monitor.